

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

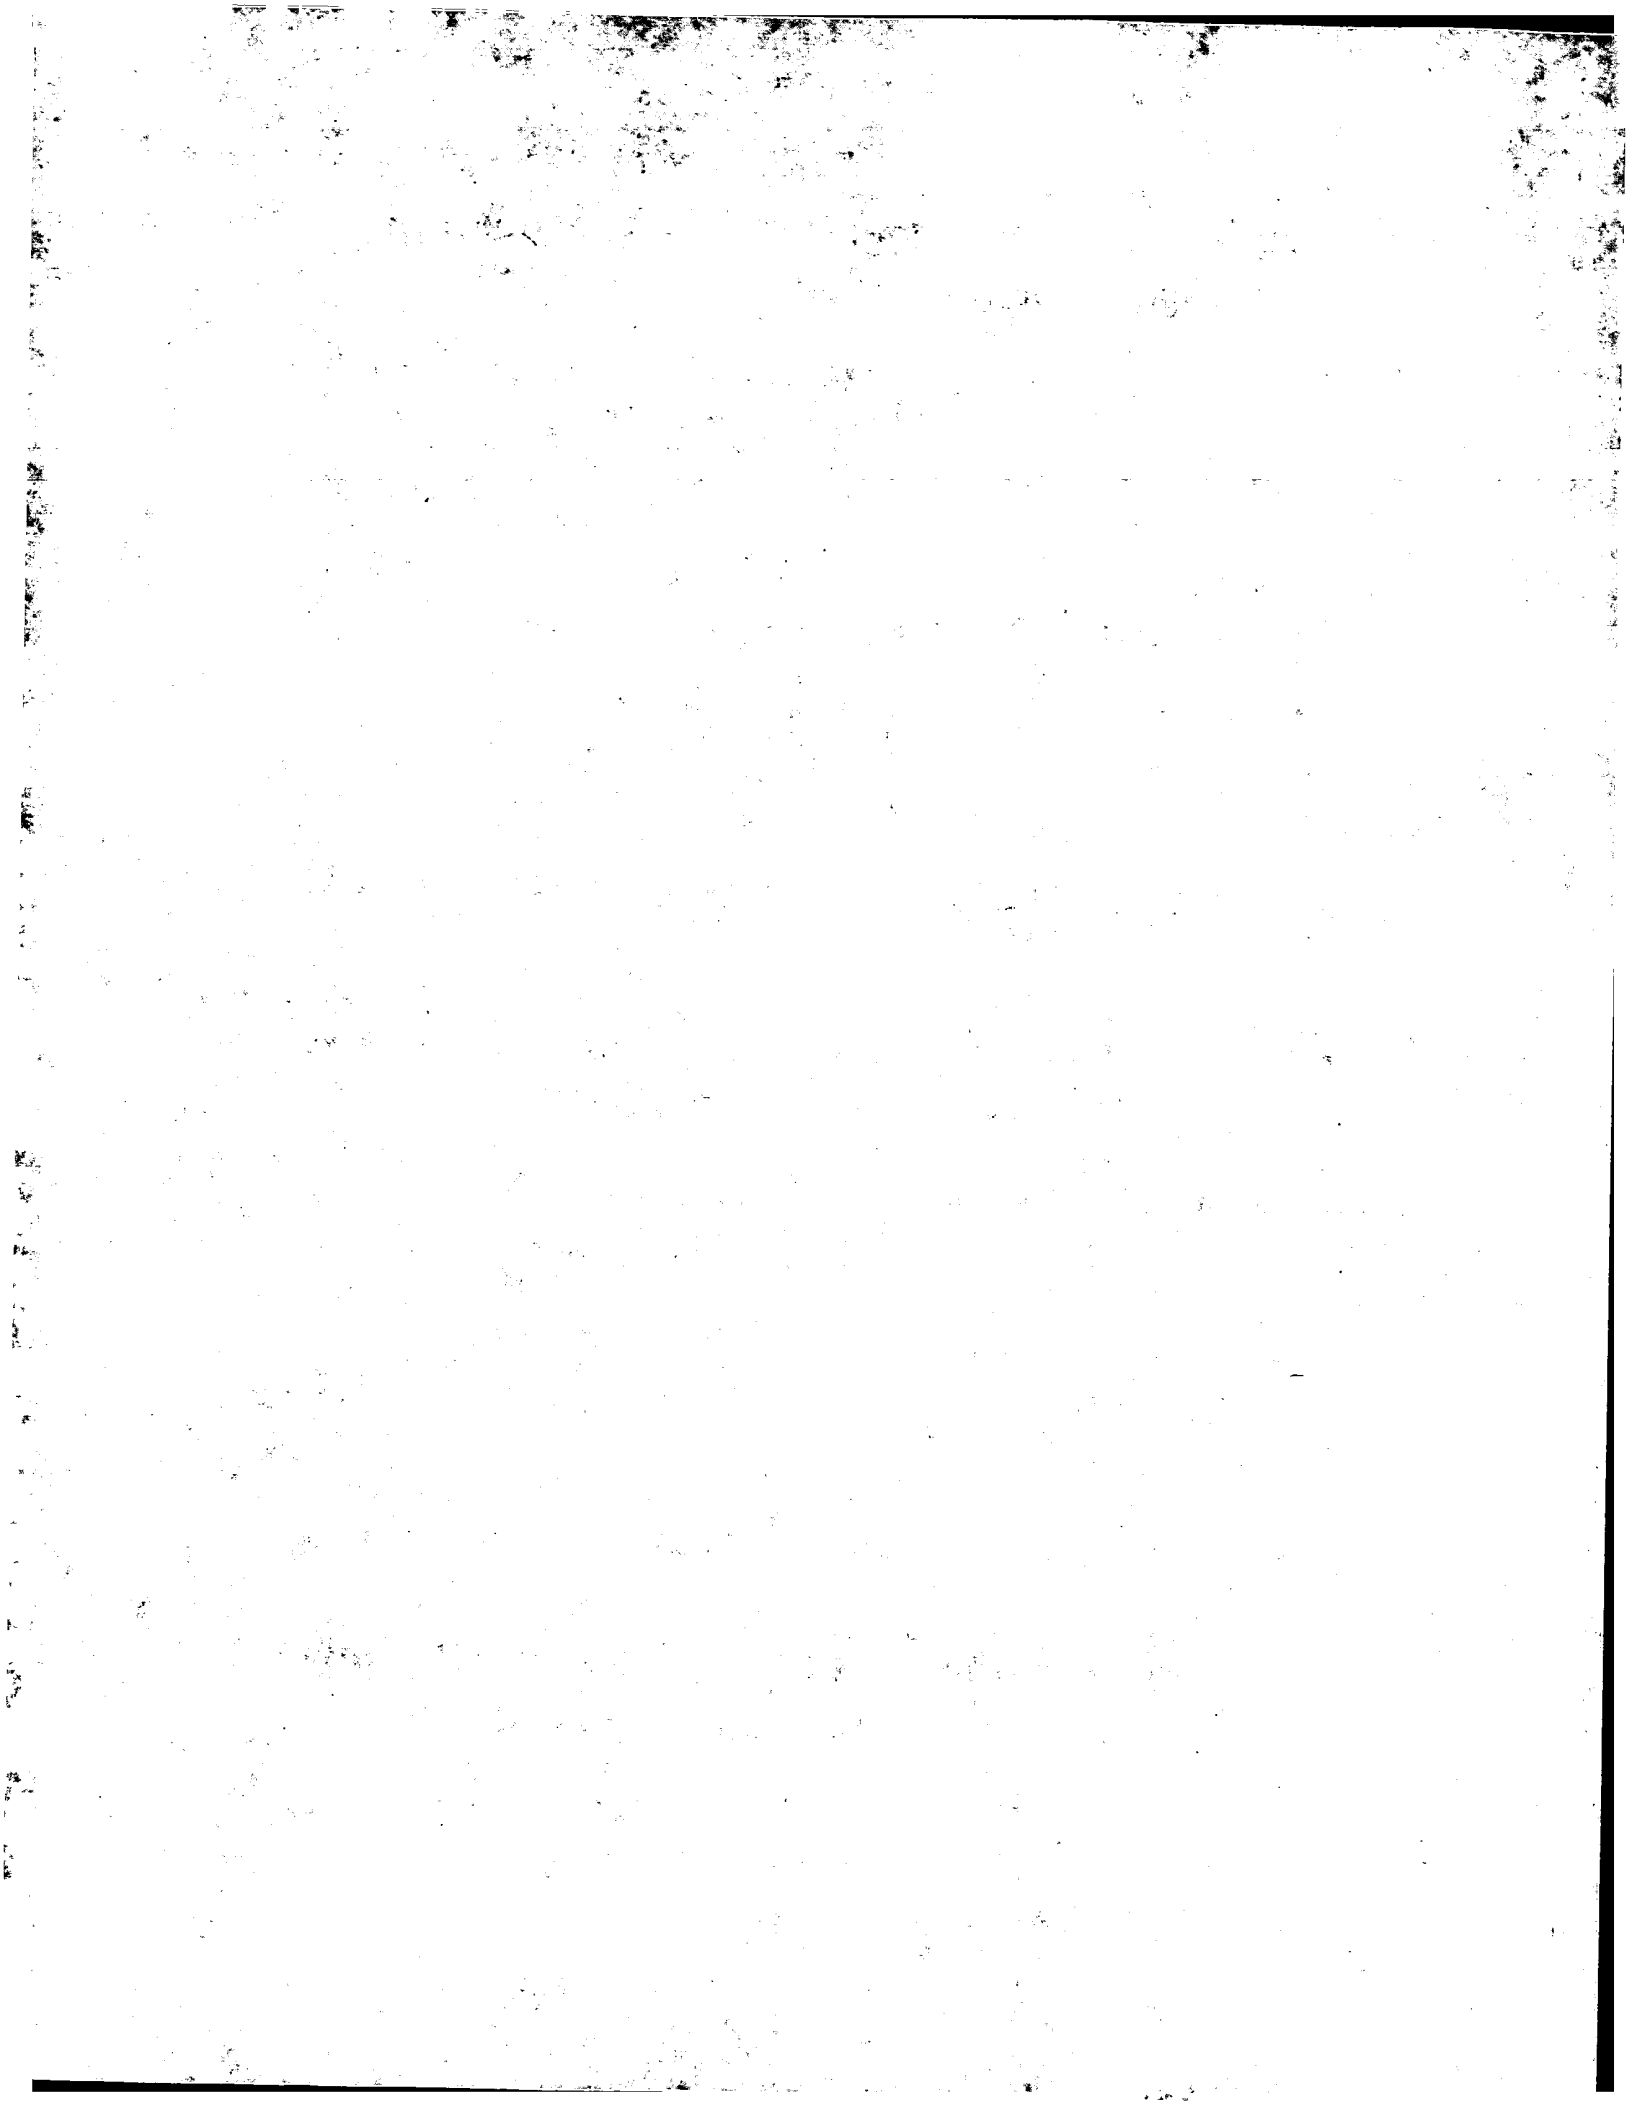

## PATENT ABSTRACTS OF JAPAN

(11)Publication number : 09-201487  
(43)Date of publication of application : 05.08.1997

(51)Int.Cl.

D06F 35/00

(21)Application number : 08-044014

(71)Applicant : FUKAZAWA KIYOSHI

(22)Date of filing : 24.01.1996


(72)Inventor : FUKAZAWA KIYOSHI

(54) WASHING BAG

(57)Abstract:

PROBLEM TO BE SOLVED: To prevent washing from being caught and damaged by a fastener of a washing bag, when it is put in or taken out of the washing bag or when it is not in the washing bag.

SOLUTION: A net bag 1 having an opening 2 through which washing is put in or taken out of the bag is folded at a folding line 3d in such a way that side parts 1a and 1a are joined with each other and sewn, and so are side parts 2b and 2b.

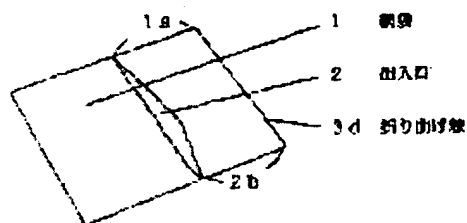

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998.2003 Japan Patent Office

\* NOTICES \*

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

CLAIMS

---

[Claim(s)]

[Claim 1] a part of side side 1a and 1a of a gate 2 side of a string bag 1 composed with fiber thread which formed a gate 2 to a string bag, and a part of side side of a string bag -- 2b and 2b are put together -- as -- a wash bag of 3d of bend lines which bent by the way and sutured 1a, 1a and 2b, and 2bs.

---

[Translation done.]

---

## \* NOTICES \*

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

DETAILED DESCRIPTION

---

## [Detailed Description of the Invention]

[0001]

[Industrial Application] When going the washing in and out into a wash bag, this invention relates to the wash bag made without the fastener so that the washing besides other wash bags might not be damaged with a fastener again so that it can scratch on a fastener and the washing may not be damaged.

[0002]

[Description of the Prior Art] Since the fastener was used conventionally, when going the washing, such as an expensive race, in and out especially, hooked on the fastener, and it hurt and other washing besides a wash bag had been damaged.

[0003]

[Problem(s) to be Solved by the Invention] This had a defect like the next.

(b) Since the fastener was used, the washing had been hooked and damaged with the fastener, when going in and out.

(b) Since the fastener was used, other washing besides a wash network had been damaged. This invention is made in order to remove these defects.

[0004]

[Means for Solving the Problem] a part of side side 1a and 1a of the gate 2 side of the string bag 1 composed with fiber thread which formed a gate 2 to a string bag, and a part of side side of a string bag -- 2b and 2b are put together -- as -- 3d of bend lines -- by the way, it bends. And 1a, 1a and 2b, and 2bs are sutured. This invention is a wash bag which consists of the above configurations.

[0005]

[Function] When washing the washing with a washer, in order to prevent a pain and slag, the washing is put into a wash bag and washed, but if the washing is put in and washed from a gate 2 and wash finishes, the washing will be taken out from a gate 2.

[0006]

[Example] Hereafter, the example of this invention is explained.

(b) a part of side side 1a and 1a of the gate 2 side of the string bag 1 composed with the fiber thread which formed the gate 2 to a string bag, and a part of side side of a string bag -- 2b and 2b are put together -- as -- 3d of bend lines -- by the way, bend.

(b) Suture 1a, 1a and 2b, and 2bs.

When using this with the above structures and it washes the washing with a washer, the washing is put into a wash bag and this invention washes it, in order to prevent a pain and slag, but if the washing is put in and washed from a gate 2 and wash finishes, it will take out the washing from a gate 2.

[0007]

[Effect of the Invention] (b) Since it does not hook on a fastener when going the washing in and out, since a fastener is not used, don't hurt.


(b) Since a fastener is not used, don't damage other washing besides a wash network with a fastener.

---

[Translation done.]

Drawing selection Representative drawing

---

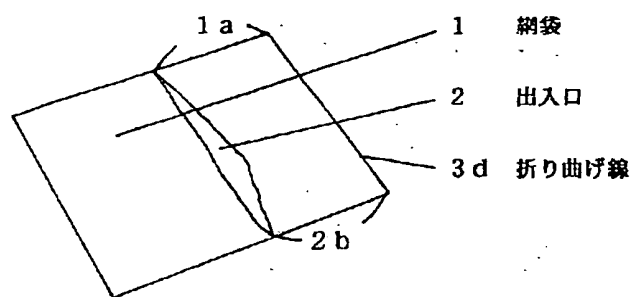


---

[Translation done.]

Drawing selection drawing 2

---

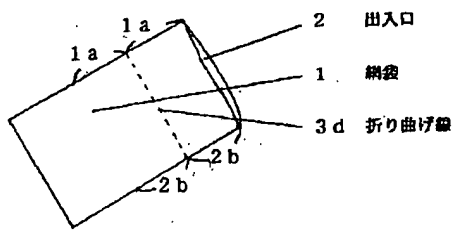

[Translation done.]

